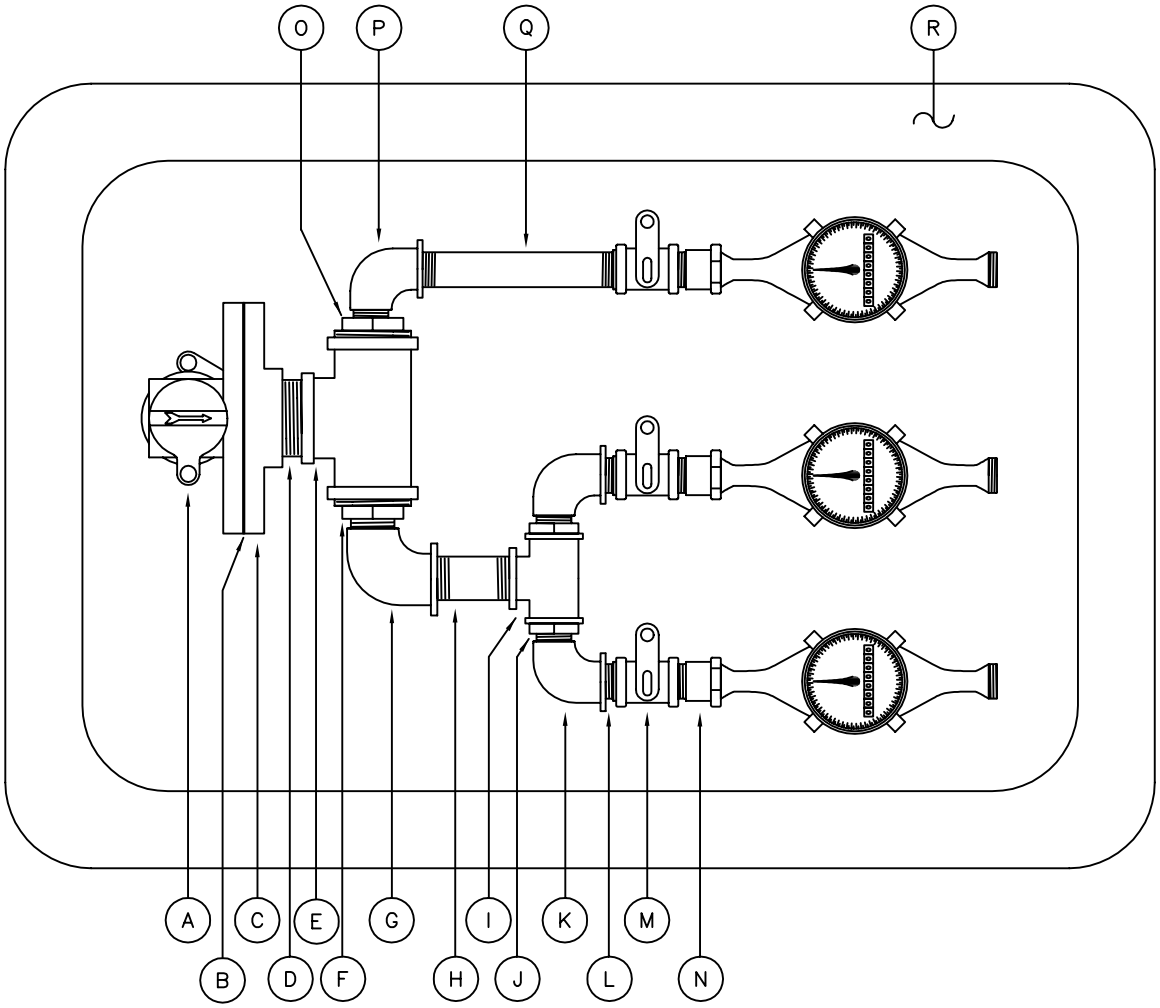

KEY	QTY	MATERIALS	KEY	QTY	MATERIALS
A	1	2" BRONZE ANGLE CURB STOP WITH WING–LOCK	J	2	1" TO 3/4" BRASS BUSHINGS
		(MUELLER 300 SERIES OR EQUAL)	K	3	3'4 BRASS STREET ELLS
B	1	2" RUBBER METER GASKET (FORD #GT141)	L	2	3/4" BRASS CLOSE NIPPLES
C	1	2" BRONZE METER FLANGE WITH 2" FEMALE THREADS	M	3	3/4 BRONZE BALL VALVE CURBS STOPS – STRAIGHT
		4"x4" DIP ELL, FLG. x FLG.			(MUELLER 300 SERIES OR EQUAL)
D	1	2" BRASS NIPPLE – 2" LONG	N	3	3/4" BRONZE STRAIGHT METER COUPLINGS
E	1	2" BRASS TEE			(FORD #C38–23–2.5)
F	1	2" TO 1" BRASS BUSHING	O	1	2" TO 3/4" BRASS BUSHING
G	1	1" BRASS STREET ELL	P	1	3/4" STREET ELL
H	1	1" BRASS NIPPLE – 3" LONG	Q	1	3/4" BRASS NIPPLE 6" LONG
I	1	1" BRASS TEE	R	1	CHRISTY FL–36 FIBERLYTE OR B–40 METER BOX AND LID

REV. 01/04

NOTE: SEE W–8 FOR SERVICE INSTALLATION. SEE W–29 FOR ADDRESS TAGS

Dublin San Ramon Services District	DATE APR 1997
2" WATER SERVICE WITH THREE 5/8" METER MANIFOLD	DESIGNED SB
SIGNED COPY ON FILE AT DISTRICT OFFICE	DRAWING W–24B